

# ENGINEERING TOOL



## CONTENT

Engineering Tool LASAL One tool for all automation tasks	3-5
LASAL CLASS Program controls with object orientation	6-15
LASAL HMI Tools User-friendly visualization implemented	16-18
LASAL SCREEN Comfortable visualization design	19
LASAL VISUDesigner Web visualization - open for anything	20-21
LASAL MOTION High performance tool for drive technology	22-25
LASAL SAFETYDesigner Seamlessly integrate safety	26-29
LASAL SERVICE Tools that simplify engineering	30-31







## ALL-IN-ONE

For modern machine manufacturing, clearly constructed and modular software is an essential factor for success.

Modularity and reusability are cornerstones for efficient and flexible application development. These properties allow you to quickly program and configure customer-specific machine software.

The object-oriented engineering suite LASAL from SIGMATEK provides you with exactly this simple reusability of modularly constructed application code and the flexibility that comes with it. LASAL unifies all automation tasks on one platform and contributes to significantly reduce development times and time-to-market.

The consistent engineering tool provides clarity and simplifies the handling of modular machine and system concepts. A factor that is increasingly important in the era of the "Internet of Things". LASAL also supports platform and manufacturerindependent data exchange via OPC UA and MQTT.

# ONE TOOL FOR ALL AUTOMATION TASKS

The modern, consistent engineering environment expands the IEC 61131-3 standard with object-oriented programming (OOP) and graphic representation. LASAL enables the modularization of machine functions in the software and therewith mechatronic engineering.

In mechanics, proven constructions are often reused. Thanks to the modular structure of OOP, existing and tested application modules can also be easily reused. The software machine functions (objects) can be assembled in a toolkit system and simply "wired". New characteristics of machine components can therefore be implemented with minimum programming. Creating applications is thereby accelerated.



Parts of an application (machine functions) can be modularly assembled and easily tested. Once created, they can always be reused.

#### MODULAR AND FLEXIBLE THROUGH OOP

The advantage of OOP is its consistent modularity from the lowest level of the individual functions upwards to the complete project. Machine functions can be developed, tested, added, exchanged – individually or in groups. And when not used, an option can be hidden.

Object-oriented programming with graphic representation

LASAL CLASS



For regulation and control tasks in drive technology



Conveniently configure and program safety applications

LASAL SAFETY

Tools for remote maintenance, simulation, software updates, data exchange



#### CLEARLY TO THE APPLICATION SOFTWARE

Graphic representation of the software components in LASAL encapsulates the complexity of the project and enables clear structuring of the software.

#### LOW CODE & LIBRARIES

LASAL stands for less code and less programming. The approach to software design is top-down: starting from the overall project, the required functions and machine components that exchange data are defined. Development then begins bottom-up. Basic functions do not have to be programmed line for line, instead pre-de fined software components simplify creating applications. In extensive libraries, tested function components (classes) are available. In addition, ready-to-use templates and topic-based packages are provided. This simplifies engineering enormously.

#### **COMFORTABLE DEBUGGING**

The rapid development and comprehensive analysis of programs is possible with the integrated debugging tools, such as setting breakpoints, online diagnosis in the network, value changes directly in the network, sending entire command chains with parameters or the first diagnosis without confrontation with code.

### HOT FACTS

#### CONSISTENT DEVELOPMENT

all automation tasks unified in one software environment

#### MODULAR OBJECTS

that can be flexibly applied and reused

#### CLARITY

via graphic representation and efficient extras like the Machine Manager

#### SUSTAINABLE CODE

through the use of tested encapsulted function blocks with clear interfaces outward

## MACHINE MANAGER: FOR DISTRIBUTED INTELLIGENCES

Using the Industry 4.0 and Smart Factories approach, small mechatronic units with their own processing intelligence are networked with one another in a flexible complete system. The LASAL Machine Manager enables the clear display of individual software projects. It also regulates the communication between distributed

#### LASAL SPEAKS 4.0

For networked and open communication in the Smart Factory, LASAL offers predefined packages for implementing OPC UA and MQTT protocols. Manufacturer-independent, flexible data exchange between machines or between machines and primary systems such as ERP, MES, EDGE and Cloud are possible. intelligences in a multi-CPU solution: Who can exchange which data with whom? The system configuration can therewith be customized and expanded at any time with optional function units (e.g. handling robots).

The LASAL Machine Manager has the data flow for multi-CPU concepts well in hand.




#### **PROGRAM CONTROLS WITH OBJECT ORIENTATION**

## LASAL CLASS

With LASAL CLASS, object-oriented programming is child's play. A consistent operating concept, graphic representation and ready-to-use function modules bring you quickly to your goal – whether the control task is simple or complex.

With LASAL, user-friendliness is the focal point. You can use the advantages of object-oriented programming, such as modularity and simple reusability, without having to come into contact with the complex syntax. The code reads like conventional structured text and you can therefore concentrate on the implementation of the methods (functions). That saves a lot of time and worry.





#### WORK WITH OBJECTS

With object-oriented programming, the various components of a machine or system are represented in the form of objects. Behind each object, is a class. It is the blueprint of the object and defines the program code and the corresponding data elements. Each class can assume a specific task, for example, measuring and evaluating a temperature, regulation of a valve or controlling a conveyor belt. The classes defined by the programmer are stored in clearly organized libraries.

#### AN OVERVIEW OF EVERYTHING

Graphic representation provides operator ergonomics with object-oriented programming with LASAL. Using drag & drop, a class is integrated into the object network from the project tree. An instanced, real object is therewith constructed. The objects need only be connected to one another and an application is generated. LASAL CLASS creates all declarations and function bodies automatically. Through graphic representation, you get a complete overview of the project at a glance: the functions, the relation between objects, the data traffic and the interfaces. Complex relationships are therefore more transparent and easier to check or change.

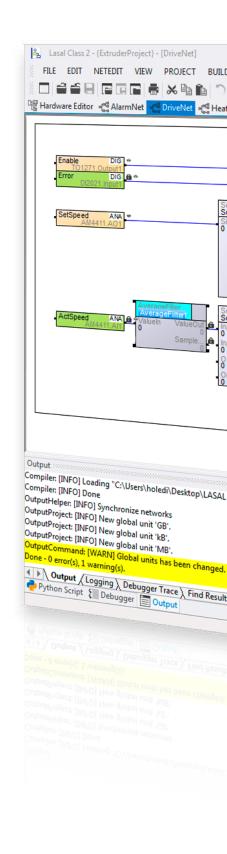


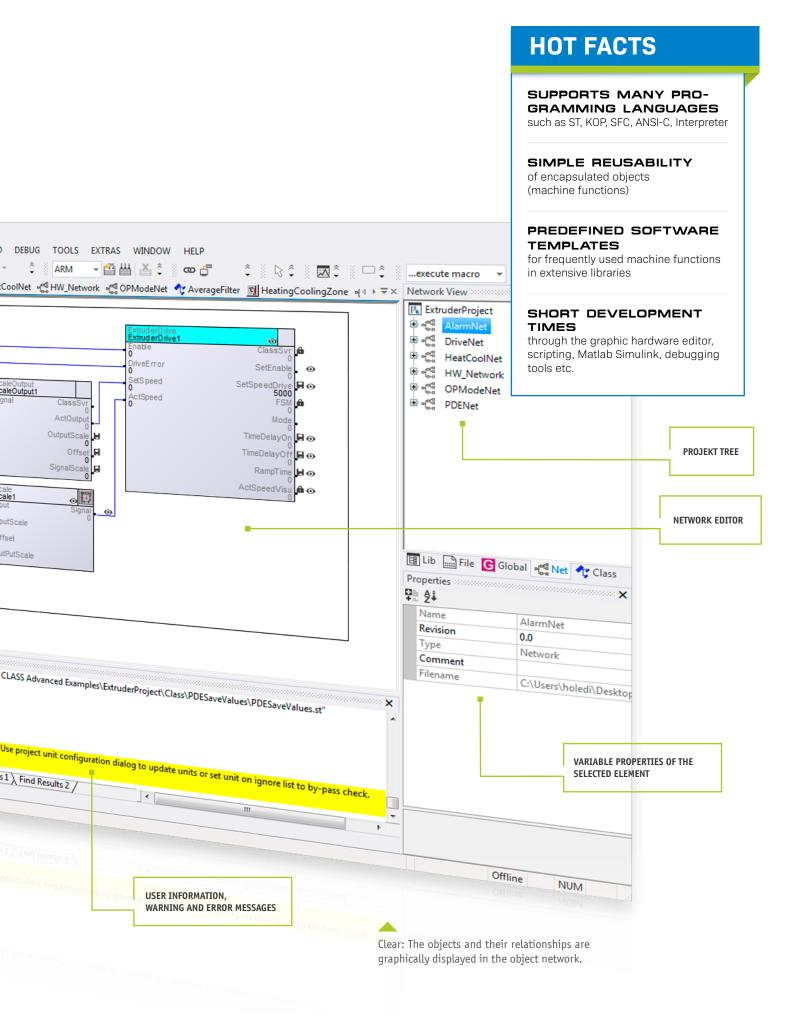


1 55

#### OBJECT-ORIENTED INSTEAD OF PROCEDURAL

In pure procedural programming, data or variables are managed separately from code. The missing definition, such as how the interaction between code and data is processed can lead to defective programs.




With object-oriented programming (OOP), code and data are combined into logical units and shielded from the outside world, so that unwanted influences are prevented.



Thanks to OOP, sloppily implemented programs with variables written randomly throughout the project making it impossible to predict the effects of a change, are a thing of the past. The variable can only be manipulated via the corresponding method. Clear interfaces are therewith predefined.


#### INHERITANCE AND AGGREGATION MINIMIZE PROGRAMMING

Using inheritance, an object class can be duplicated and refined or specialized. Inheritance describes a relationship between a general class (base class) and a derived class. A derived class inherits the properties of the base class, but can be modified or expanded with additional information such as attributes or operations. Through aggregation (grouping), individual classes can be combined into a complex class. Tested classes can be clearly stored in libraries and combined into complex program structures using the toolkit principle.

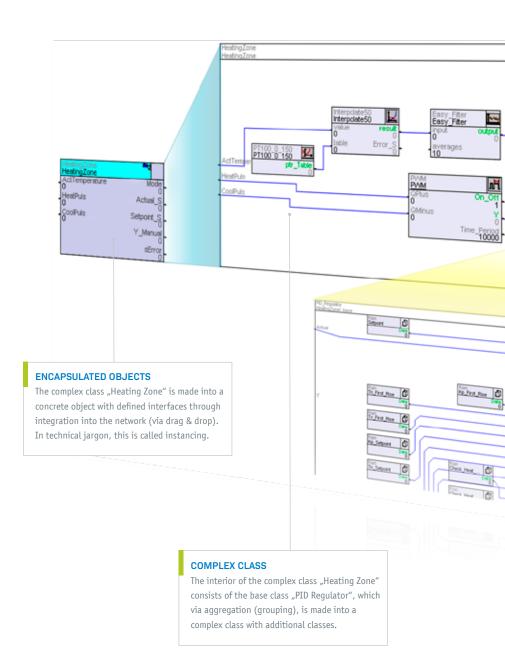


#### **OOP INSIDE**

With the techniques "inheritance", "derivation" and "aggregation", it is possible to implement new versions of machine components with minimum programming.

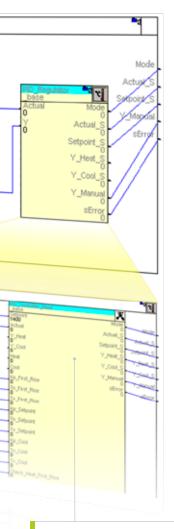

#### BASE CLASS

The base class "PID Regulator" can also be a complex class. When the base class is changed and expanded, this is called "derivation".

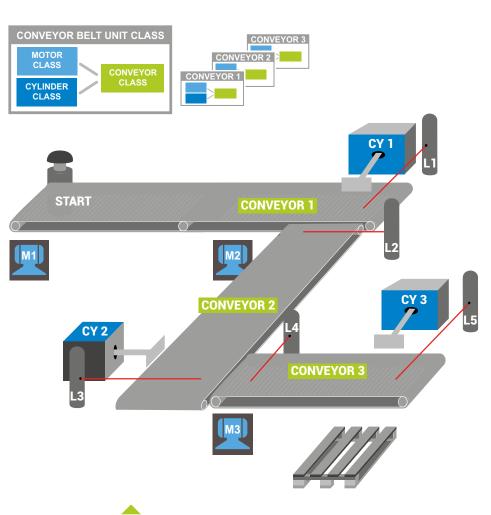

#### EXAMPLE


Transport route for goods with three sequential conveyor belts: each conveyor belt is driven by a motor, which has start and stop conditions and a cylinder at the end that pushes the package further. Three classes are therefore modeled: motor and cylinder control, as well as conveyor belt (start/stop conditions). Through aggregation (grouping), a complex class "Conveyor Belt Unit" can be created from these three classes.



#### OBJECT-ORIENTED PROGRAMMING IN FAMILIAR LANGUAGES

With LASAL, the actual program code of an object is implemented in the conventional program languages: structured text (ST), ladder diagram (LD), graphical sequential function chart (SFC) – all according to IEC 61131-3 norm – as well as ANSI-C and

interpreter. The object-oriented programming methods are therefore available as an integrated extension of the trusted languages.

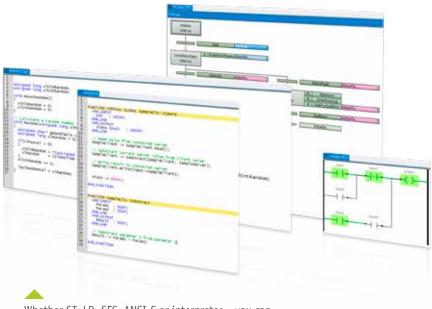

#### LASAL SUPPORTS MATLAB SIMULINK


In Matlab Simulink, existing C code models can be directly inserted into LASAL. During import into the engineering tool, the C code is packed into a class automatically. Input and return values are defined by the user; LASAL generates the code automatically. Possible changes in the model can be made in Matlab Simulink and reimported into the LASAL project with the push of a button.

Whether ST, LD, SFC, ANSI-C or interpreter – you can program in the language that you are familiar with.

#### SOFTWARE DEVELOPED IN A TEAM

The source code files in LASAL are not managed in data bases. Instead, they are stored in a folder structure as pure text files (file system). This allows a simple connection to version management systems.

The version management allows multi-project and multi-user project structures for working in larger engineering teams: modules or program components can be developed separately and then combined into a complete whole. This increases the flexibility and the time-to-market cycles are shortened.

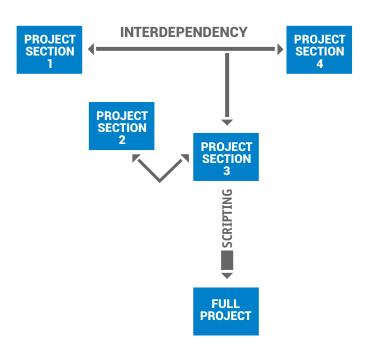



The graphical hardware editor provides great clarity for project development.

#### HARDWARE EDITOR SIMPLIFIES I/O PROJECTION AND DIAGNOSTICS

The hardware editor is a comfortable tool, which significantly reduces the development and programming time of applications. In addition to the tree display, it is also possible in the graphical editor to reproduce the hardware components analogous to the real control cabinet configuration. This enables simple and efficient project design, parameterization and diagnosis of the hardware elements connected to the control, such as I/Os, interfaces or drives for example. In addition to the hardware, the topology of the bus structures can be well represented with the graphical editor.

Finding and inserting a module is comfortably solved in the hardware editor. Possible control configurations can be run realistically. While comparing the configuration in the LASAL project with the actual hardware in the control, possible deviations are identified.

Hardware Editor
6 10 T 2 II
🗟 📍 CP111 (HwControll, SdiasPLC1, VaranManager_21)
# 501AS:00, 01200 (012001)
S Class State (ClassState) <-[]-> (_ClassOk
-S Device ID (DeviceID) <-[]-> (1001)
-S FPGA Version (FPGAVersion) <-[]-> (16#000
-S Hardware Version (MeVersion) <-[]-> (1620)
Serial Number (SerialNo) <-[]-> ("0304564
Retry Counter (RetryCounter) <-[]-> (0)
LED Control (LEDControl) <-{]-> (0)
Digital Input 1 (Input1) <-[]-> (0)
Digital Input 2 (Input2) e-[]-> (0)
Digital Input 3 (Input3) <-[]-> (0)
Digital Input 4 (Input4) <-[]-> (0)
■ Digital Input 5 (Input5) ~[]→ (1)
Digital Input 6 (Input6) <-[]-> (0)
Digital Input 7 (Input7) <-[]-> (1)
Digital Input 8 (Input8) <-[]-> (1)
Digital Input 9 (Input9) <-{]-> (0)

Diagnostic statements can be made with the hardware editor during active operation. Via the colored background, whether modules are in error status is visible at a glance. The online diagnosis is even possible up to the individual I/O points.

#### COMMUNICATION: CLIENT-SERVER TECHNOLOGY

The communication between the objects is based on client-server technology. This means that the client requests a service, which is provided or processed by the connected server. Read and write instructions are sent over ONE connection.

#### **EVERYTHING UNDER CONTROL**

The real-time operating system maintains control over the tasks to process and ensures that all objects are processed exactly component is only then active when it is "initiated". Unlike conventional systems, the CPU load can be considerably optimized.

Through this event control, a program



within the specified time slot. The user is also provided with three different task priorities: Real-time, Cyclic and Background.

## CLEVER TOOLS

-----

INARD CONTRACTOR

Used Memory (DPRAM) - 35.31%

SILING

2

With the "PLC Trace View" tool, the time behavior of a project can be recorded. This tool is used to analyze, diagnose or measure the time of the task behavior.

line

#### **Resource Calculation**

All resources in view: Using the resource calculation for VARAN and S-DIAS modules, consumption data, available memory and total current, including power loss, are clearly displayed.

#### **Online Debugger**

With the online debugger, functions such as setting breakpoints and conditional breakpoints, scan counters, single-step processing and forcing are provided. Possible program errors can therewith be found quickly.

#### **Real-Time Data-Analyzer**

The data analyzer allows a realtime display of signal curves with an additional history function. The view can be toggled between trends and the classic oscilloscope display (with or without tracing). Individual bits can also be recorded from bit fields. Start and stop triggers can also be set and a hold function is integrated.

LiveView [RO]

end\_if;

END\_FUNCTION


state 1312936 := READY;

Debugging Context: LiveViewObj

1 FUNCTION VIRTUAL GLOBAL LiveView::Cywork

// Divide temp by 3
temp44548 := Division(temp313644, 3); eck if temp is same as mem mp4[4548] = mem[4548] then classSvr 4548 := temp4 4548;

// Initialize temp variables
// Initialize temp2[4548] := temp3[13644] := temp4[4548] := 0;
// Read parameter value from connected server
(ltParam[4548] := CltParam.Read();
// Add parameter value to temp
// Add parameter value to temp1[0], CltParam[4548];
// Multiply temp2[4548];
// Multiply temp2[4548];
// Multiply temp by 3
temp3[13644] := Multiplication(temp2[4548], 3);
temp4[4548] := Division(temp2[4548], 3);

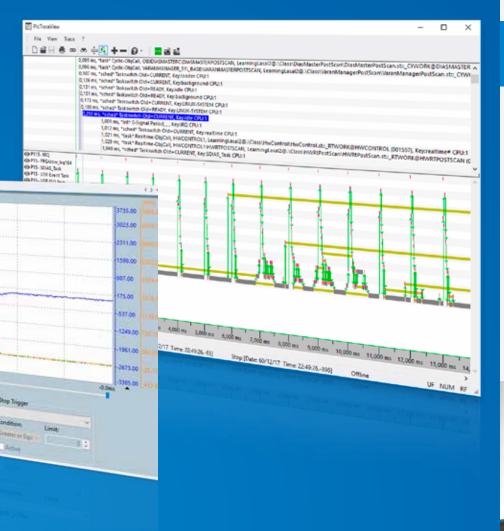

#### **DIGITAL TWIN**

To support model-based development with a Digital Twin, all outward-facing I/O object classes have been significantly extended in LASAL. These "advanced I/Os" no longer need real connections at their "outer" end but can operate in various modes with predefined or simulated values, or values created in the Digital Twin. Tests and optimization can be thereby performed, without the physical hardware and mechanics. This helps to reduce development time and minimize the development risk. Currently there is a connection for iPhysics from machineering.




#### Advanced Debugging Tools

LASAL provides comfortable tools for online diagnostics and testing. File Commander File operations to/from the control RAM Image Save/restore remanent data PLC Trace View Recording of a project's time response PLC Backup & Restore Save/restore files and remanent data in the control

#### **Visual Object View**

The feature VOV "Visual Object View" provides the ability to use objects from LASAL SCREEN with all their properties in the programming environment LASAL CLASS. The user can connect visualization objects and the corresponding program code to units. This has the advantage that especially in multi-user project structures, frequently used machine components such as a temperature regulator for example, always look the same – regardless of which software engineer works on the project. With the VOV, system components can be configured offline and visualized or tested over an online connection. Predefined VOV files such as initial start-up or parametrization of axes, controllers and timers can be integrated or edited.




3

#### **QUICKLY TO THE APPLICATION SOFTWARE**

"Less programming – more configuring" is the recipe for success of modern engineering tools like LASAL. You are supported in the implementation of your machine or system software with ready-to-use, tested function components and packages, which cover a broad range of machines.

Quickly and conveniently to the application software: The extensive LASAL Libraries support you with a large number of ready-to-use, tested function modules such as PID regulator, temperature monitoring, complex filter and regulation algorithms, various motion modules and robot kinematics or communication protocols.

In addition, prefabricated templates and topic-related packages are available in the LASAL Machine Manager. The "StartUp" package includes a modern basic template as well as standard functions such as recipe management, access control, diagnostics and much more. Function components and packages can be modularly implemented in your application using the toolkit principle. There, it's clear that you can reduce the development times considerably. Depending on the complexity of your application, you achieve time savings of up to 70 percent. At the same time, the software quality increases.



#### **READY-TO-USE TEMPLATES & PACKAGES**

#### Control Modules

PID regulator, operating mode manager, filter algorithm

#### Organisation & Usability

Login function and implementation of access authorizations, user and file management, alarms, recipe management

#### Data Analysis

Recording and evaluation of measurement data

#### Communication

OPC UA, MQTT, VNC , TCP/IP, Modbus TCP Robot Kinematics


#### Delta, SCARA, portal

#### Industry-specific Functions

3D-Printer, temperature control, OPC UA for Robotics Server, EM77, EM82.1, EM82.3, synchronous feed, pick & place

MIC On Manager	
нал на	

## SOFTWARE VARIANTS WITH A BUTTON PUSH

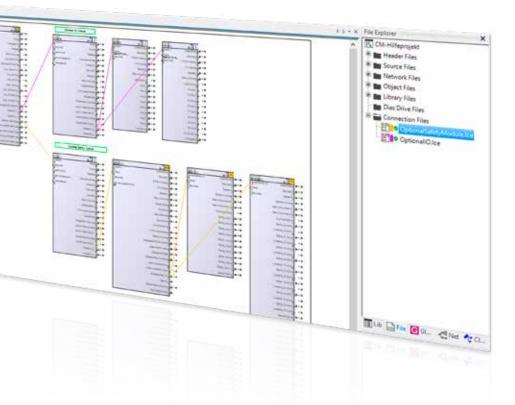

#### 1 PROGRAM – ANY NUMBER OF VARIATIONS

Starting with a base project, different variations of an application can be managed in one project with the variant editor.


With a simple mouse click, variants can be activated or deactivated. Changeable for example are connections, I/O assignments or initialization values. The relationships between the individual objects can be configured as desired via so-called connection files. Since each variant is an independent file, recompiling is unnecessary. The active configuration need only be loaded into the control.

#### SCRIPTING: AUTOMATICALLY CREATE PROGRAMS

Based on the encapsulated software component of the OOP, various machine configurations can be easily modeled from a base project. The corresponding software can be automatically generated using the scripting language Python. Similar to the generation of parts lists, the program for the specific machine or system can be generated with the push of a button via scripting.

#### EXAMPLE

A customer orders the base type A of a machine. With this type A, he would like to have the optional functions 1, 3, 6 and 7. The application software for this specific machine can be created fully automatically, without requiring the software engineer to manually change a program line. For this purpose, the library containing predefined classes is accessed, which contains all different modules. Starting with the basic program, the specific modules are selected for type A, the desired special functions for the options then added and the fitting application program generated with the push of a button.

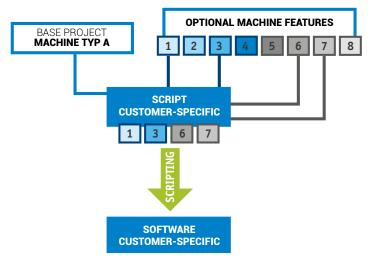

## **HOT FACTS**

#### SIMPLY CONFIGURE short development times with configur-

short development times with configuring instead of programming

#### QUICKLY READY-TO-USE

thanks to the extensive graphic library, design templates, predefined controls and Add-Ons

BELT

0

¢2

BETROK

62%

翻

2

¥.

₫

Â

DPAOD 2 PALE B C H E E

.....

#### CLARITY

Compart Command A Street A Str

D Lasal

FILE

Default

@LSE/pr

0

LA

ø

-

manage any number of languages in a project; text lists for translation purposes

## **PRACTICAL FEATURES** alarm, events and file management,

recipe management, etc.

## VISUALIZATION IMPLEMENTED USER-FRIENDLY

Operating and monitoring are essential components of every automation task. With LASAL SCREEN and the web-based LASAL VISUDesigner, comfortable tools for hardware-independent visualization design are provided.

#### SIMPLE – WITHOUT PROGRAMMING KNOW-HOW

Easily implement complex structures – with the modern LASAL HMI tools, intuitively create operator interfaces through pure configuration. Programming know-ledge is not required. The user defines the variables available for the visualization in LASAL CLASS. A LASAL SCREEN or LASAL VISUDesigner project can visualize data from multiple LASAL CLASS projects.

#### **GRAPHIC COMPONENTS**

The advantage of object orientation can also be used in the visualization. The LASAL HMI tools provide the options, as in LASAL CLASS, to assemble complex "graphic components" via grouping. Each of these graphic components can be linked with an object in LASAL CLASS. Individually created components can be placed, scaled as desired and referenced to a corresponding LASAL CLASS object. The display and operation of a temperature regulation zone, for example, is defined only once and then reused for any number of regulation zones.

lono/bi	Temp(bil	TompCiri Temp Tomp 2	TEMPZONE 1	TEMPZONE 2	TEMPZONE 3
Tenspitoreti Controler(in Chi_ON Set_port 1600 Acti eng 1580 Tolesarce 1580 MiniTong Maximum 2000	TerrisZond2 Cartrelector Gell_OFF Selector 4000 ActTerre 100 MeTerre 4000	TempZone3 Controller On Setpoint 850 AdTiene 880 Tolerance Miniteme 800	200 548 100 74 53 5 50 50 50 50 50 50 50 50 50 50 50 50 5	40 54 40 7 14 10 40 10 10 10 10 10 10 10 10 10 10 10 10 10	568 66 °C 9 °C 191 25 °C EN Config





#### FLEXIBLE IMAGE DESIGNS

With LASAL SCREEN and the LASAL VISU-Designer, you can easily create the visualization of your application in the corporate design of your company. For project development, modern design templates and a large graphic library are available. In addition, it is also possible to import

#### MANY FEATURES AVAILABLE

In addition to numerous input and display elements, the HMI tools offer the user a variety of functions such as alarm maexisting or self-defined graphics (bmp and jpg). Through the definition of a global image and the individual images derived there from, the project development time can be significantly reduced.

nagement, event logbook, trend display,

bar diagrams, recipe management etc.




Content and layout are separate from one another and can be easily changed and reused.

## into a different language for example and reimported into the project. The reusability, clarity and simple handling of the texts are thereby increased.

#### **CLEVERLY CONVERT LANGUAGE AND UNITS**

LASAL SCREEN and the LASAL VISUDesigner can manage any number of languages in one project. Text information is entered in the form of ASCII or Unicode. Individual languages from one project can be reinstalled separately via text lists into an existing machine. Text lists can be switched in online mode, whe-

reby the units of measurement can be changed. For example, the length in "mm" is automatically converted to "inches". The programmer does not have to worry about unit conversion in LASAL CLASS, as all system values are available in the LASAL base unit.



UNIT SETTINGS		LANGUAGE SETTINGS		
Length	mm			Deutsch
Speed	mm/sec			English
Weight	kg	•		
Temperature	pound	_		
Pressure	kg	_		

CLEAR TEXT MANAGEMENT

To integrate the appropriate label onto graphic elements, text lists are provided. Any number of lists with individual names can be created. Each text list can be exported separately, edited - for translation

#### **COMFORTABLE VISUALIZATION DESIGN**

## LASAL SCREEN

To implement various visualization tasks quickly and easily, with LASAL SCREEN a user-friendly HMI tool is provided.

With LASAL SCREEN, creating a visualization is child's play. For project development, integrated designs and a large graphic pool (library) are available. Complicated programming is eliminated. Project components such as images, text lists or variables can also be exported and imported with LASAL SCREEN. In addition, user-defined libraries with reusable elements can be created.

#### VISUALIZATION UNDER WINDOWS

With the DotNetKernel, or "Kernel" in short, the user can visualize individual machine data under Windows. The visualization project created in LASAL SCREEN is interpreted in the Kernel and displayed.

All visualization elements integrated into the LASAL SCREEN editor are supported by the DotNetKernel. Additionally, the entire scope of the Microsoft .NET framework is also available. The integration of user-defined elements, as well as the connection to networks, data banks, Internet, MS Office, e-mail etc. is thereby simplified. The DotNetKernel is based on the .NET framework 3.5 and is implemented in C# using the graphic framework WPF (Windows Presentation Form).

#### **USER-DEFINED GRAPHIC AREA "MYIO"**

With "MyIO", the user can specify screen areas in which self-defined visualization elements such as special diagrams can be comfortably integrated. The programmer is thereby supported with completed interfaces – e.g. touch events, redraw method.

#### QUICKLY READY-TO-USE WITH LASAL ADD-ONS

Application templates are available, which in addition to the finished process control project, also contain the correct visualization. An example of this is login functions and access authorizations, event journal or an oscilloscope for recording multiple channels.





#### WEB-VISUALIZATION - OPEN FOR ANYTHING

## LASAL VISUDESIGNER

With the web-based HMI tool, modern platform-independent operating concepts can be created through simple configuration. At the same time, HTML5 specialists have maximum freedom to individualize.

HTML5, CSS3 (Cascading Style Sheets) and JavaScript – the LASAL VISUDesigner is based on current web standards. Modern web technologies enable new operating concepts for efficient and intuitive operation of machines and systems. Using the »svg« file format, (scalable vector graphic), graphic elements can be simply adapted to different screen formats and visualization solutions with variants for diverse target devices easily created.

#### **HIGH-PERFORMANCE**

To date, web visualization in automation has lacked performance. Thanks to the optimized HTML5 browser, the LASAL VISUDesigner enables dynamic visualization that runs fluidly even on smaller processors. Multi-touch interactions are also supported, as is the transfer of process data via OPC UA. Controls from third-party manufacturers can therefore be easily integrated into a smart machine network.


## CONTENT AND LOGIC SEPARATE

Content and layout of the operating surface are in the VISUDesigner completely separated. In the graphical editor, elements can be assembled without extensive programming knowledge using puzzle-like elements (function blocks). The advantages of object orientation are also usable in the visualization. Like the graphic elements, the underlying functions can be reused and modified as desired.



#### WYSIWYG - WHAT YOU SEE IS WHAT YOU GET

The graphical editor follows the »What you see is what you get« principle. Already during editing, the developer sees the screen mask as it will later appear on the selected target device.

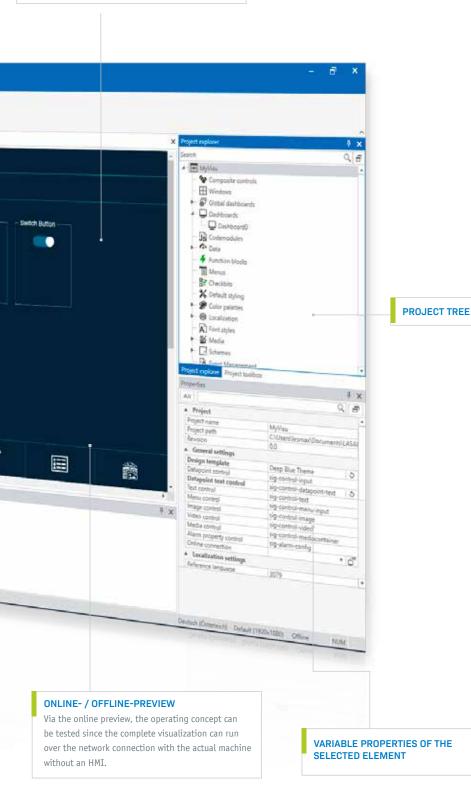

### **HOT FACTS**

WEB BASED hardware-independent visualizations based on HTML5, CSS3, JavaScript

**STRONG PERFORMING** optimized browser ensures fluid visualization concepts even on less powerful hardware

**OPEN SOURCE CONTROLS** many options for individualization and reuse

**ONLINE PREVIEW** test operating concepts directly in

test operating concepts directly in the tool

#### **UNLIMITED FREEDOM**

Programming and visualization experts have complete freedom to utilize web technologies: Individually designed graphics, controls, animations, videos and audio files can be easily integrated. The predefined operating elements are largely open source and can simply be implemented, adapted or modified. In terms of individual design everything is possible. The LASAL VISUDesigner supports working in development teams, including source code management and version control.

#### **DIFFERENT VIEWS**

In VISUDesigner, the respective "View" can also be flexibly defined for different devices. This depends on whether the person accessing the machine is local or remote, what type of terminal device is being used, and what access rights and competencies the operator has, the appropriate landing page with the corresponding rights can be stored in "Views Management". In the graphically programmed logic, it is possible to define under which conditions which view is to be loaded.

# HIGH PERFORMANCE TOOL FOR DRIVE TECHNOLOGY

LASAL MOTION simplifies the integration of motion control into the machine and system concept. Predefined, hardware-independent motion templates support you in the modular and yet, fully integrated development of your drive design.

The object orientation enables thinking in drive trains and mechatronic units, which can be flexibly combined depending on the application. LASAL MOTION is seamlessly integrated into the PLC programming and project development tool LASAL CLASS. In addition to the performance, the availability of the machine or system thereby increases.

#### EFFICIENT MOTION CONTROL

Axial movements can be executed using simple data inputs or instructions without any programming. In LASAL CLASS, there are predefined parameter sets for the SIGMATEK DIAS drives and motors – that saves a lot of time, since only user-specific data has to be modified. Alternatively, you can of course store individual parameter sets.

## SHORT START-UP AND DIAGNOSTIC TIMES

With the "Motion Diagnostic View", axes can be comfortably parameterized and started. Commands can be quickly sent and troubleshooting is simple. Graphic representation provides operating comfort and clarity. Start-up and diagnosis of the drive components are also reduced significantly.



TripodRob



## **HOT FACTS**

AXIS MOVEMENTS without programming

PLUG & PLAY extensive library with motion templates

EFFICIENT FEATURES such as Data Analyzer, Motion Diagnostic View, CAM Designer

independent of the hardware



-0.01

-33.00

0.00

HW Error Overflow Error Emergency

mm

mm/s

mm/s



23

#### **INTERNAL DATA ANALYZER**

The SIGMATEK DIAS Drives contain an internal data analyzer, with which all configuration and controller data can be collected at a scan rate of up to 62.5  $\mu$ s. This data is recorded in the converter in real time. With the software tool, they can be displayed in one and the same screen view for analyzing and optimizing the controller behavior.

#### **CONTROLLER START-UP SOLVED GRAPHICALLY**

Current, rotation speed and position controller are displayed in the software graphically. All respective control parameters are visible at a glance and can be set individually. The controller can therefore be quickly and easily optimized. The configuration data of the drives are stored in the control system. The drive therefore always has the current parameters and an exchange is possible without effort and a software tool.



E UNEAR INTERPOLATION E POINT TO POINT E CIRCULAR INTERPOLATION E HELIX E CAM DISCS E ELECTRONIC GEARS EX CUVING SAMIS

#### **READY-TO-USE MOTION OBJECTS AND TEMPLATES**

The LASAL MOTION library provides a broad selection of predefined objects and templates for typical motion functions. Motion control tasks can therefore be comfortably implemented, without having to be programed.

The spectrum ranges from simple one to complex multi-axis applications: positioning, cam discs, contouring control with transformations for robot kinematics, CNC functions and synchronization of up to nine axes in a space. Jerk-limited motion profiles or dynamic safety zone monitoring is also included.


Application technicians can simply integrate the fitting motion components or templates in their project and after setting a few parameters, start the application directly or run a simulation.

#### SIMULATION

Whether synchronization of axes in a space, CNC code or complex robot kinematics – all motion functions can be easily simulated.


#### CAM DISC COUPLING WITH THE CAM DESIGNER

With the CAM Designer, calculations for coupling cam discs can be performed comfortably. The user defines master and slave axes as well as the number of interpolation points. Based on this, position, speed, acceleration and jerk curves can be displayed. Various interpolation types are available, so that an exact adaptation to the application is possible.

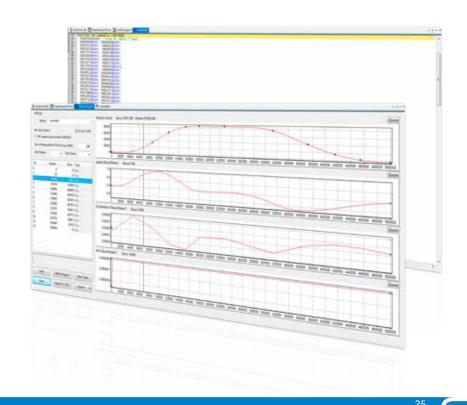

#### SEAMLESSLY INTEGRATE SAFETY

## LASAL SAFETYDESIGNER

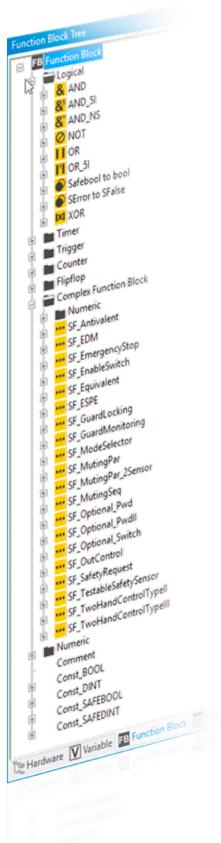

Safety applications can be easily programmed and configured with the SAFETYDesigner fully integrated into LASAL.

Comfortable and fast – that is how you can implement your Safety application with the LASAL SAFETYDesigner. An extensive library with function blocks is available, with which Safety-oriented processes can be easily configured. You select the appropriate function blocks such as "emergency stop" or "operation mode select switch" then place and wire them in the network.

#### NUMEROUS SAFETY FUNCTION BLOCKS

In addition to certified standard function blocks such as logic, timer, trigger or counter, the library includes numeric and many typical, complex Safety function blocks – based on the PLCopen standard. Counted among these are for example, functions such as emergency stop, muting par, two-hand control or guard locking.

#### **FLEXIBLE CONCEPTS**

In the SIGMATEK Safety concept, multiple Safety controllers with I/Os can be designed and managed per project. Machine options can be administered in one project.

#### **EFFORT MINIMIZED**

The simple operation of the LASAL SAFETY-Designer and clear representation of the project reduce the time and effort for programming, maintenance, diagnostics and especially validation.

#### SAFE MOTION

With the LASAL SAFETYDesigner, safe motion such as "Safe Position" or "Safe Speed" for example, can be implemented comfortably.

In the LASAL SAFETY library, numerous function blocks are provided. This increases programming comfort.

## **HOT FACTS**


INTEGRATED simple programming & configuration of the Safety controller

READY-TO-USE SAFETY FUNCTION COMPONENTS based on PLCopen standard

HIGH COMFORT comfortably create logic operations and I/O configurations

#### ONLINE-STATE DIALOG


download, online monitoring and debugging via online interface

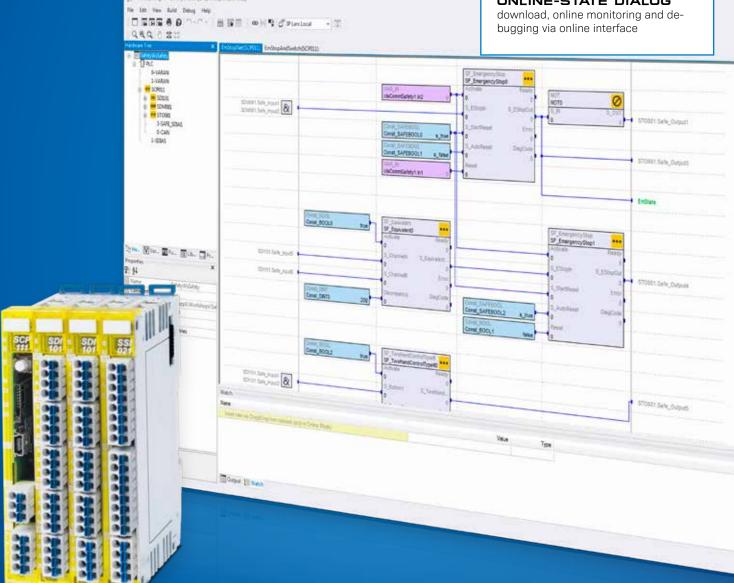

27

#### SIMPLE OPERATION AND CLEAR REPRESENTATION

The LASAL SAFETYDesigner offers the same operating comfort as LASAL CLASS. In the graphical editor, function blocks, as well as in and outputs can be freely placed via drag & drop from the project tree. Connections of 2-channel functions are made in the network – also via drag & drop. With the SAFETYDesigner, a connection to a function-oriented control can also be made.

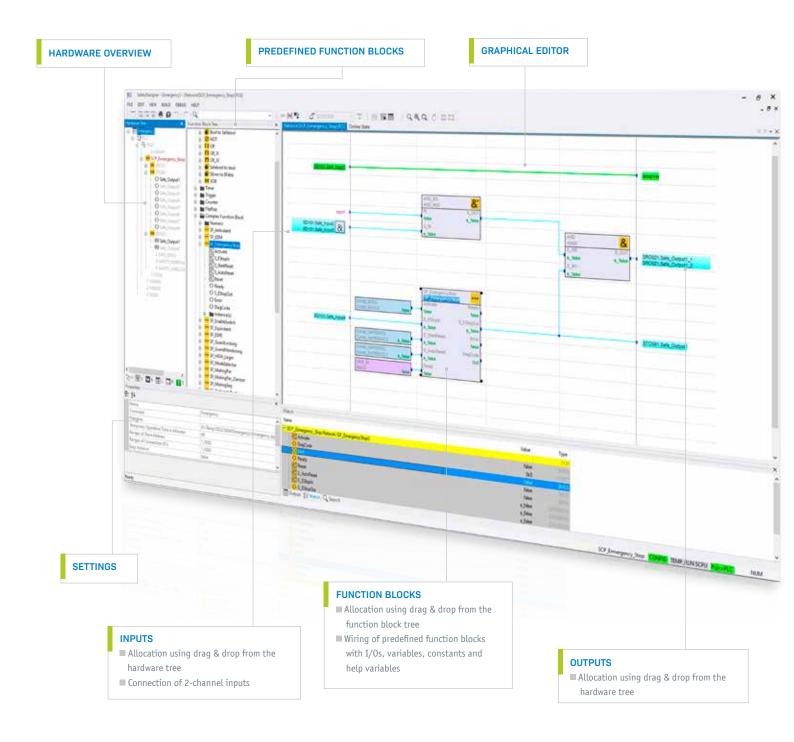


#### **DEBUGGER INTEGRATED**

The integrated debugger graphically displays all values and the signal flow. It is also possible to force inputs, outputs and constant values.

#### LOGIN AND PROGRAM DOWNLOAD

All online actions of every Safety controller available in a project are centrally listed in the online state dialog. Included in these actions are for example, login, error cancelling or downloading. In addition, status information from the Safety controller as well as diagnostic messages from in- and outputs are displayed.

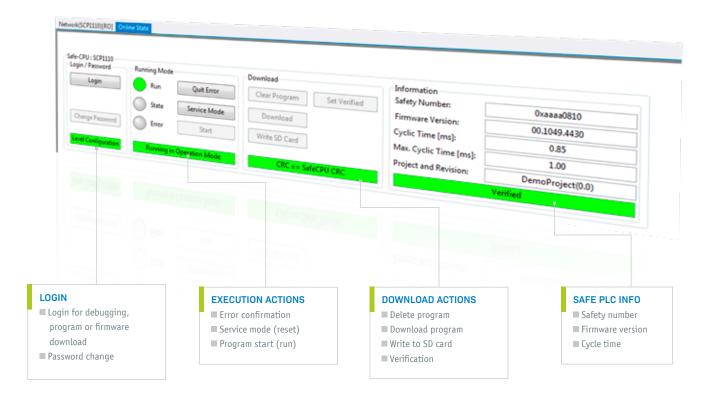

#### STAND-ALONE USABLE

With the SAFETYDesigner, a Safetyoriented application can also be implemented for the S-DIAS Safety system as stand-alone solution.

### **HOT FACTS**

EXCHANGE DATA manufacturer and platformindependent via OPC UA and MQTT

#### WORLDWIDE REMOTE MAINTENANCE

diagnostics and remote maintenance via web server, as well as VNC client and server

**UPDATES SIMPLE** with the Update Tool

SIMULATION SAVES TIME Windows-based simulation of control program and visualization

**FTP Client & Server** 

The FTP server provides a folder in the control, in which CPU program files can be stored or read. These files can be retrieved by a SIGMATEK CPU or a third-party device with an FTP client function.

#### **VNC Client & Server**

SIGMATEK controls support VNC server and VNC client functions. For tablets and smart phones, there are free client apps. The SIGMATEK VNC server has a repeater extension. Data exchange with controls that are protected by firewalls is therefore possible. VNC client and server thereby form a connection to a repeater, which performs the data exchange.

#### Webserver with LRMView

LRMView is an add-on software (Java-Applet) for the control system. It provides the option to display or control the on-site visualization with a standard web browser (password protected). This has the advantage that no additional software must be installed in the computer. The control can therewith be remotely serviced and operated from any PC with an Internet connection.


## LASAL SERVICE

Whether cross-platform data exchange, simulation, loading of software updates or worldwide remote access for diagnostics and maintenance – LASAL supports you with efficient tools.

#### LARS SIMULATIONS TOOL

The LASAL Runtime System (LARS) provides a Windows-based simulation of control programs and visualizations, with which LASAL applications can be run without physical hardware. Application areas:

- Test system for application design
- PC-based visualization system



#### **OPC UA Client & Server**

The OPC Unified Architecture communications protocol enables manufacturer and platform-independent data exchange, which makes a good choice for implementing Industry 4.0 concepts. OPC UA functions according to the client-server principle and is supported by LASAL. In LASAL CLASS the user can define which process data can be read or written.

#### **MQTT Client**

The MQTT protocol is designed as a transmission medium for machineto-machine (M2M) communication. In the publish/subscribe model, clients (e.g. sensors or IoT devices) send messages on specific topics to the broker without communicating directly with each other. The broker acts as an intermediary and distributes these messages to all clients interested in the respective topic. Messages are sent with a definable Quality of Service (Qos). An MQTT client is implemented in LASAL CLASS.

#### Update Tool

With the Update Tool, program changes concerning sequence, visualization, control & co can be carried out collectively on a comfortable interface in the Machine Manager: Simply enter the relevant commands, set parameters, comment if necessary and then update at the push of a button. From the point of view of quality management, machine applications can thus be imported into the controllers - securely, without error sources and reproducibly. The process runs fully automatically and delivers a result file (log file) at the end. This not only ensures quality, but also reduces the time required. This is especially true for multi-CPU applications, where programs can be imported centrally from one point into all CPUs of the machine. The "Make Update Sticks" function is also available in the Machine Manager. This makes it possible to copy the updated files to a USB stick. In this way, a complete software package can be triggered on site at the machine or plant simply by plugging in the USB stick.

#### INTERNATIONAL

#### **AUSTRIA - CORPORATE HEADQUARTERS**

SIGMATEK GmbH & Co KG 5112 Lamprechtshausen Sigmatekstraße 1 Tel. +43 6274 43 21-0 Fax +43 6274 43 21-18 www.sigmatek-automation.com office@sigmatek.at



#### CHINA

SIGMATEK Automation CO., Ltd 315040 Ningbo · Room 15A03, Building A, No. 555, Jingjia Road Tel. +86 574 87 75 30 85 Fax +86 574 87 75 30 65 www.sigmatek-automation.cn office@sigmatek-automation.cn



BELGIUM SigmaControl B.V. 2992 LC Barendrecht Tel. +32 329 770 07 www.sigmacontrol.eu office@sigmacontrol.eu



#### **FINLAND** SARLIN Oy Ab

01610 Vantaa Tel. +358 105 50 40 00 www.sarlin.com asiakaspalvelu@sarlin.com

### 

ITALY SIGMA MOTION SRL 36075 Montecchio Maggiore (VI) Tel. +39 0444 60 75 75 www.sigmamotion.it info@sigmamotion.it

#### 

JAPAN SUMITOMO HEAVY INDUSTRIES, LTD. Mechatronics Division 141-6025 Tokyo Tel. +81 3 67 37 25 32 www.shi-mechatronics.jp ryuji.nakajima@shi-g.com

#### GERMANY

SIGMATEK GMBH 76829 Landau Marie-Curie-Straße 9 Tel. +49 6341 94 21-0 Fax +49 6341 94 21-21 www.sigmatek-automation.com office@sigmatek.de

#### 

#### **GREAT BRITAIN**

SIGMATEK Automation UK Limited Leamington Spa, CV32 6JX Gables House, 62 Kenilworth Road Tel. +44 115 922 24 33 www.sigmatek-automation.co.uk office@sigmatek-automation.co.uk

#### 

Servostar CO., Ltd 14988 Siheung-si · Gyeonggi-do #501, 168-28, Mokgamdulle-ro Tel. +82 31 486 87 87 Fax +82 31 486 88 84 servo@servostar.co.kr www.servostar.co.kr

#### NETHERLANDS

SigmaControl B.V. 2992 LC Barendrecht Tel. +31 180 69 57 77 www.sigmacontrol.eu office@sigmacontrol.eu

#### 0

PORTUGAL Plasdan Automation & Add-On Systems 2430-379 Marinha Grande Tel. +351 244 57 21 10 www.plasdan.pt info@plasdan.pt

#### -

SWEDEN SIGBI Automation AB 254 64 Helsingborg Tel. +46 42 654 00 www.sigmatek.se info@sigmatek.se

#### •

#### SWITZERLAND

SIGMATEK Schweiz AG 8308 Illnau-Effretikon Schmittestrasse 9 Tel. +41 52 354 50 50 Fax +41 52 354 50 51 www.sigmatek-automation.ch office@sigmatek.ch



SIGMATEK U.S. Automation, Inc. 44133 North Royalton, Ohio 10147 Royalton Rd., Suite N. Tel. +1 440 582 12 66 Fax +1 440 582 14 76 www.sigmatek-automation.us office@sigmatek.us

#### >

SOUTH AFRICA Anytech (PTY) Ltd. 2169 Tel. +27 11 708 19 92 www.anytech.co.za info@anytech.co.za

#### 

SCMA CO., LTD. 69/494 Moo 1 Tiwanon Road Banmei, Pakkret, 11120 Nonthaburi Tel. +66 2 615 48 88 www.scma.co.th contact@scma.co.th



**TURKEY** Dedem Mekatronik 35477 Menderes – İzmir Tel. +90 232 47 21 848 www.dedemmekatronik.com satis@dedemmekatronik.com



## 5 SIGMATEK